


(a) Set the ebx register

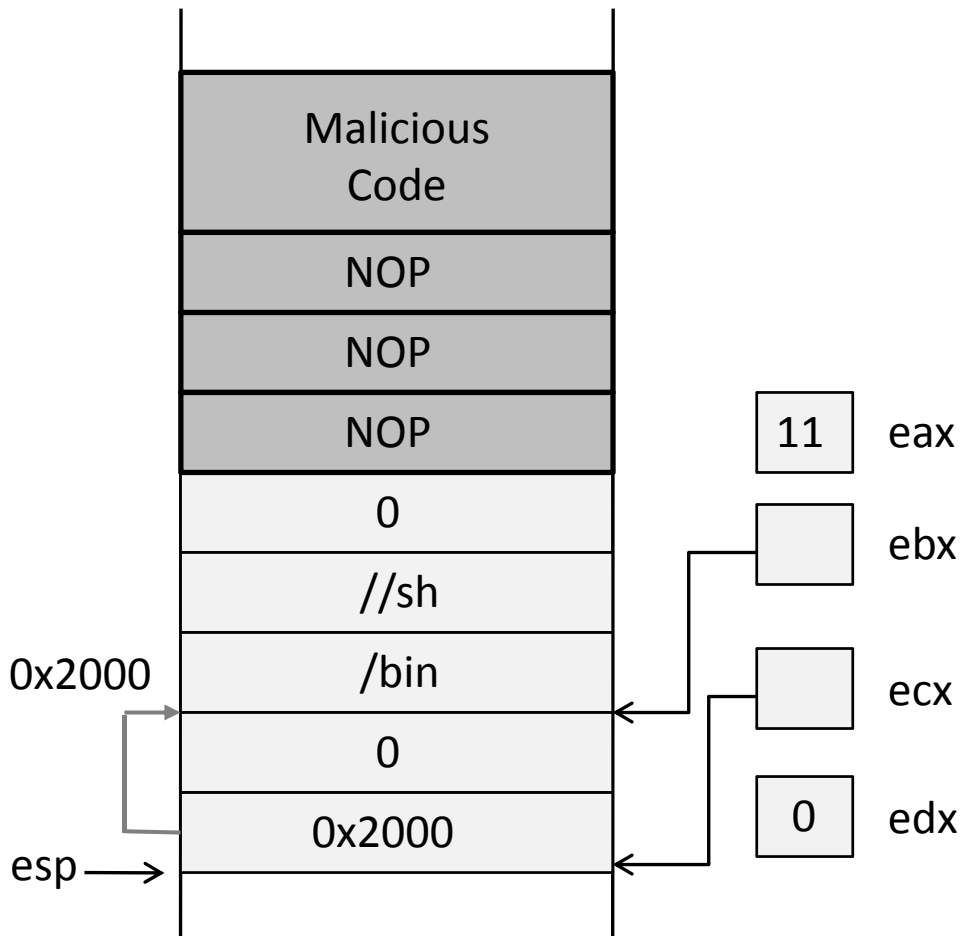

(b) Set the eax, ecx, and edx registers